


NOTES:

1. TYPE III ROCK RIPRAP WILL BE PLACE ALONG THE CREEK BANK IN AN APPROXIMATE THICKNESS OF TWO FEET. THE BANK SHALL BE GRADED FROM THE TOP TO BOTTOM IN A SMOOTH AND UNIFORM GRADE FOR THE PLACEMENT OF THE ROCK. A LAYER OF GEOTEXTILE MATERIAL SHALL BE PLACED PRIOR TO THE INSTALLATION OF THE RIPRAP.

2. THE TYPE III ROCK RIPRAP WILL BE PLACED FOUR FEET ABOVE THE HIGH WATER MARK AS STAKED IN THE FIELD.

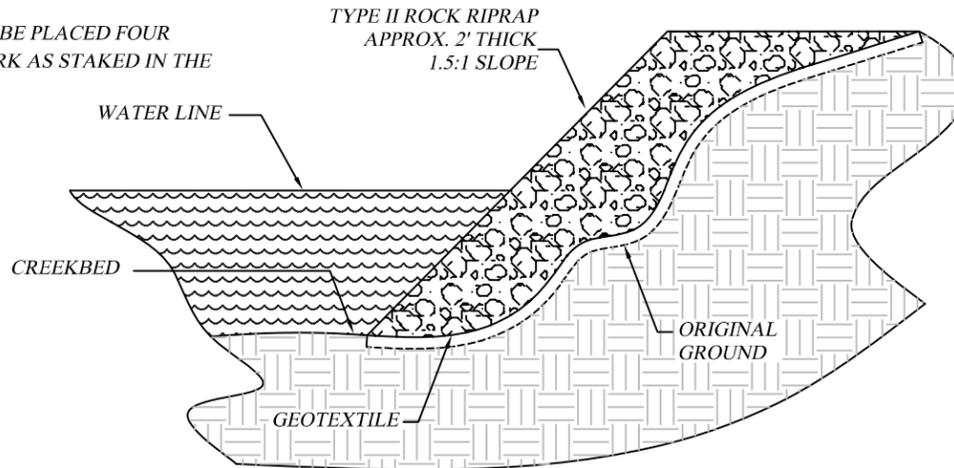

STREAM BANK PROTECTION

Designed	S.J. Blackston	Date	11/2006
Drawn	S.J. Blackston		11/2006
Checked	CEJ/GMG		11/2006
Approved	S.M. GRIMM		11/2006



ENVIRONMENTAL QUALITY TECHNOLOGY PROGRAM, A(2.5.E) SUSTAINABLE ARMY LIVE-FIRE RANGE DESIGN AND MAINTENANCE
LOW WATER STREAM CROSSING
STREAM BANK PROTECTION



File Name: 9C0520000001K2-011-0
Project Designation: 9C0520000001K2

REVISIONS		
DATE	APPROVED	TITLE
11/2006		

Sheet 11 of 24

9C0520000001K2-011-0	
STANDARD DWG. NO.	
DATE: 11/2006	SHEET 11 OF 24