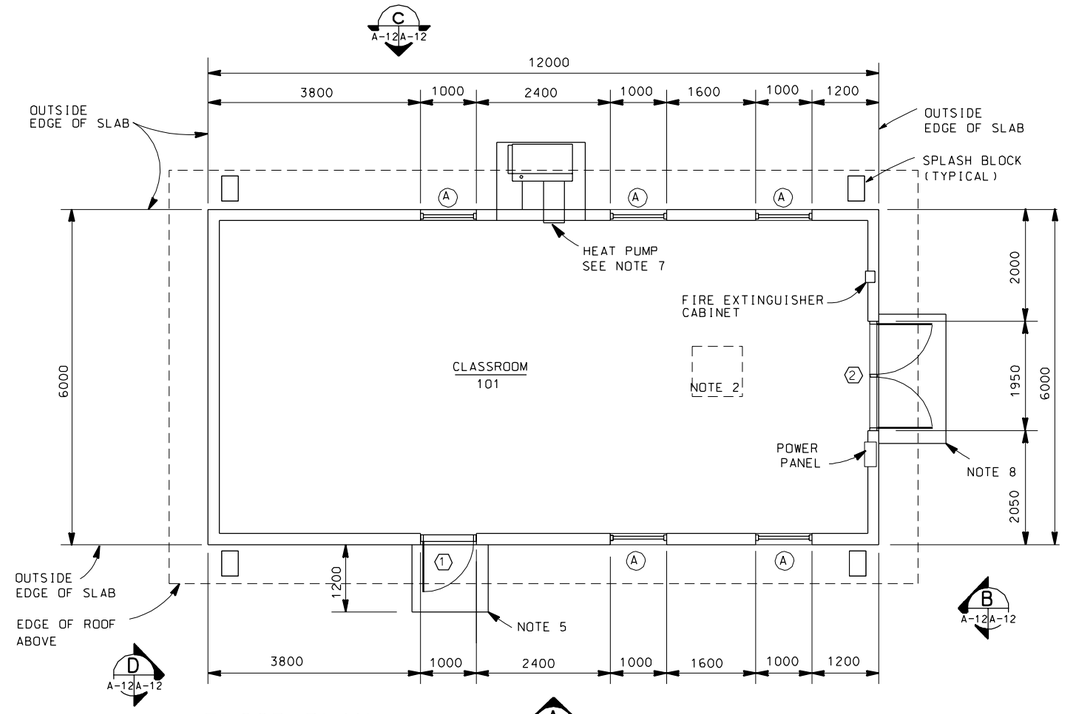

FLOOR PLAN

SCALE 1 : 50

DOOR AND WINDOW SCHEDULE						
ITEM	SYMBOL	SIZE	MATERIAL	GLAZING	HDW	REMARKS
DOOR	1	900 X 2100 X 44	METAL.INSUL.	100X450 POLYC	1	INSULATED
DOOR	2	PR 900 X 2100 X 44	METAL.INSUL.	100X450 POLYC	4	REMOVABLE MULLION
WINDOW	A	1000 WIDE X 1200 HIGH	METAL	POLYCARB.		DOUBLE HUNG

ROOM FINISH SCHEDULE					
ROOM	FLOOR	BASE	WALLS	CEILING	REMARKS
101	CONC W/SEALER	VINYL	CMU W/FILL & PAINT	16 mm GYPSUM BOARD-PAINT	

NOTES

1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE LABELED.
2. 900 mm X 900 mm FRAMED OPENING WITH ATTIC ACCESS PANEL
3. ALL OUTLETS, RECEPTACLES, AND CONDUIT SHALL BE RECESS MOUNTED.
4. SEE STRUCTURAL DRAWINGS FOR MASONRY DETAILS.
5. 1200 mm X 1200 mm X 100 mm THICK CONCRETE PAD WITH WWF. TOP OF PAD TO BE 100 mm BELOW FINISHED FLOOR AND SLOPED 30 mm PER METER AWAY FROM BUILDING.
6. SEE SHEET AX-05 FOR DOOR AND WINDOW DETAILS.
7. SEE SHEET AX-05 FOR HVAC HEAD AND SILL DETAILS. PAINT EXPOSED EXTERIOR HEAT PUMP METAL DUCT TO MATCH DOWNSPOUTS.
8. 1200 mm X 1200 mm X 100 mm THICK CONCRETE PAD WITH WWF. TOP OF PAD TO BE 100 mm BELOW FINISHED FLOOR AND SLOPED 30 mm PER METER AWAY FROM BUILDING.

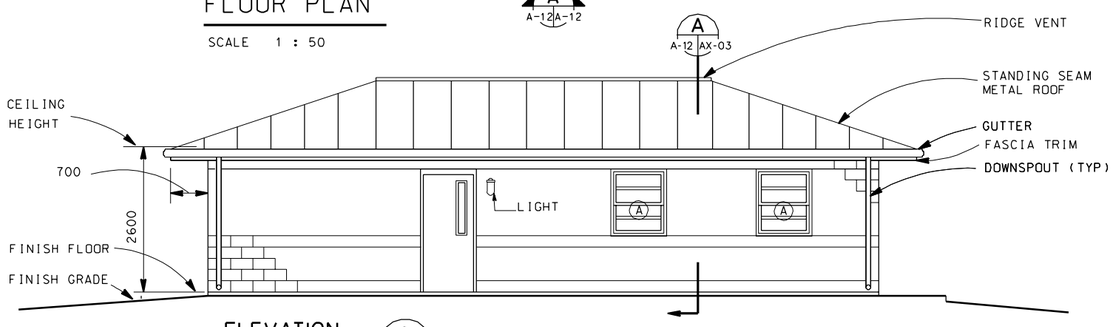

ELEVATION A

SCALE : 1 : 50

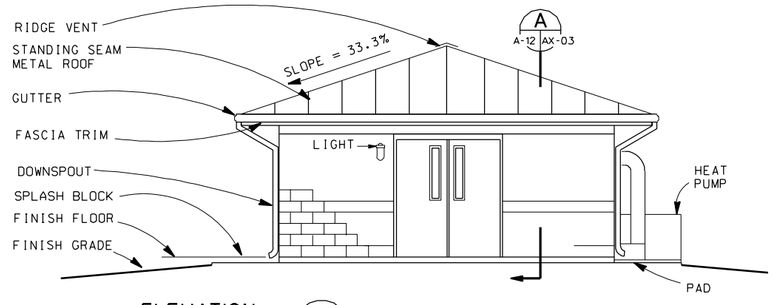

ELEVATION B

SCALE : 1 : 50

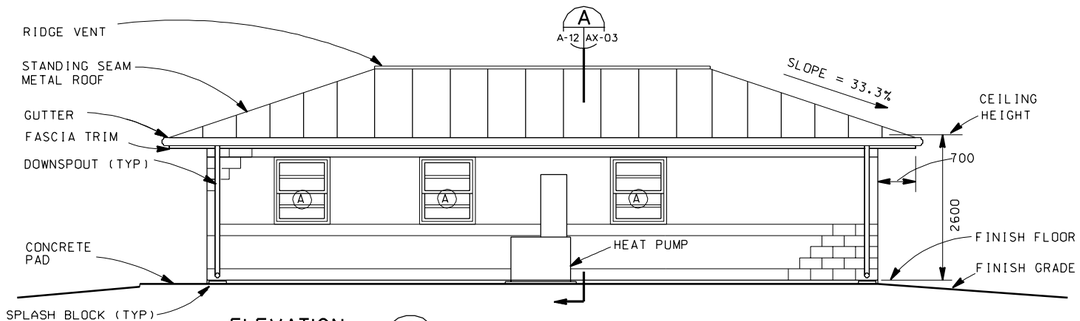

ELEVATION C

SCALE : 1 : 50

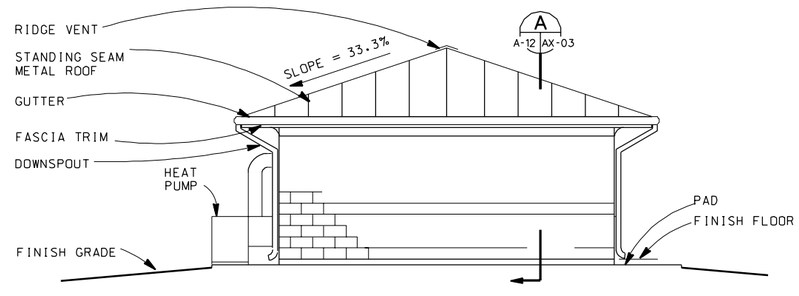

ELEVATION D

SCALE : 1 : 50

GRAPHIC SCALES

1000 500 0 1000 2000

1:50

US Army Corps of Engineers

Symbol	Description	Date	Approved	Symbol	Description	Date	Approved

Designed by: LM
Dwn by: LM
Ckd by: LM
Reviewed by: RR
Submitted by: RR
Date: 01 APR 98
Rev.
Design file no.
Drawing code: STD 171-20-01
File name: STDAX2.DGN
Plot date: 20 MAR 98
Plot scale: FULL

U.S. ARMY ENGINEERING AND SUPPORT CENTER, HUNTSVILLE
HUNTSVILLE, ALABAMA

FORCE XXI/FORCE MODERNIZATION PROGRAM
STANDARD DESIGN
GENERAL INSTRUCTION BUILDING
(MASONRY CONSTRUCTION)

Sheet reference number:
A -12
Sheet of