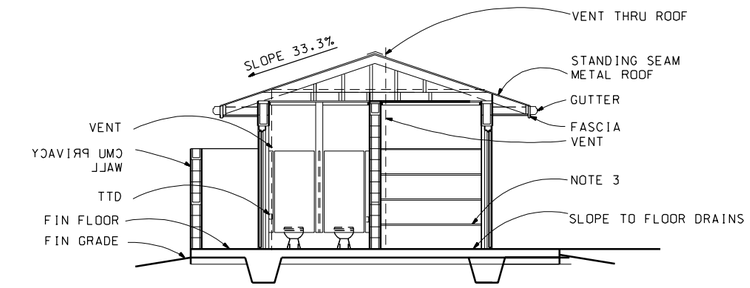

SECTION A
SCALE : 1 : 50
A-13 A-14

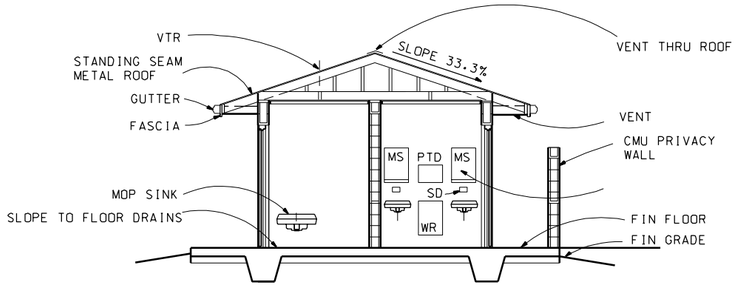

SECTION B
SCALE : 1 : 50
A-13 A-14

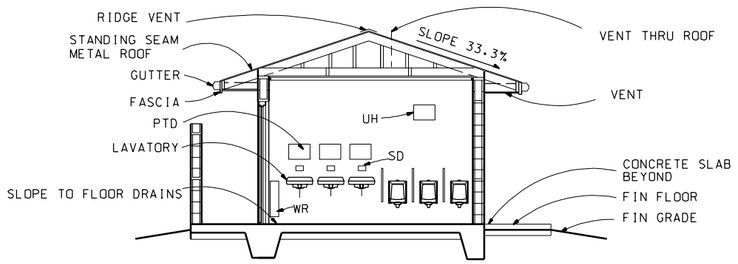

SECTION C
SCALE : 1 : 50
A-13 A-14

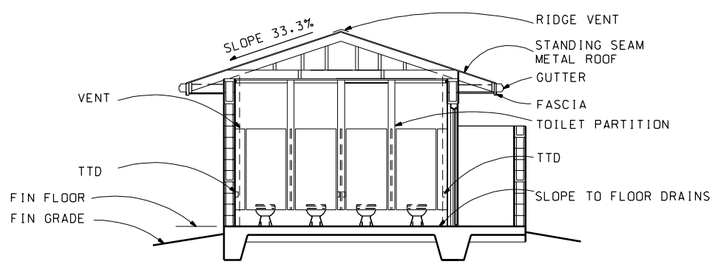

SECTION D
SCALE : 1 : 50
A-13 A-14

DOOR SCHEDULE (FIELD SERVICE HEAD)						
ITEM	SYMBOL	SIZE	MATERIAL	GLAZING	HDW	REMARKS
DOOR	1	900 X 2100 X 44	HOLLOW METAL	NONE	5	INSULATED
DOOR	2	900 X 2100 X 44	HOLLOW METAL	NONE	5	INSULATED
DOOR	3	900 X 2100 X 44	HOLLOW METAL	NONE	6	INSULATED

WINDOW SCHEDULE (FIELD SERVICE HEAD)						
ITEM	SYMBOL	SIZE	MATERIAL	GLAZING	HDW	REMARKS
WINDOW	A	1000 X 600	METAL	POLYCARB.		HOPPER TYPE. SEE STD DETAILS
				TRANSLUCENT		

ROOM FINISH SCHEDULE (FIELD SERVICE HEAD)					
ROOM	FLOOR	BASE	WALLS	CEILING	REMARKS
101	CONC W/SEALER	PAINT	CMU W/FILL & PAINT	15 mm GYPSUM BOARD-PAINT	
102	CONC W/SEALER	PAINT	CMU W/FILL & PAINT	15 mm GYPSUM BOARD-PAINT	
103	CONC W/SEALER	PAINT	CMU W/FILL & PAINT	15 mm GYPSUM BOARD-PAINT	

NOTES

1. SLOPE FLOORS TO FLOOR DRAINS.
2. CEILING INSULATION NOT SHOWN FOR CLARITY.
3. SHELVES 20 mm PLYWOOD WITH 25 mm X 20 mm NOSING. SHELVES SHALL BE 400 mm DEEP WITH 25 mm X 100 mm SUPPORTS ON WALLS.
4. SEE SHEET AX-05 FOR STANDARD WINDOW AND DOOR DETAILS.
5. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE LABELED.

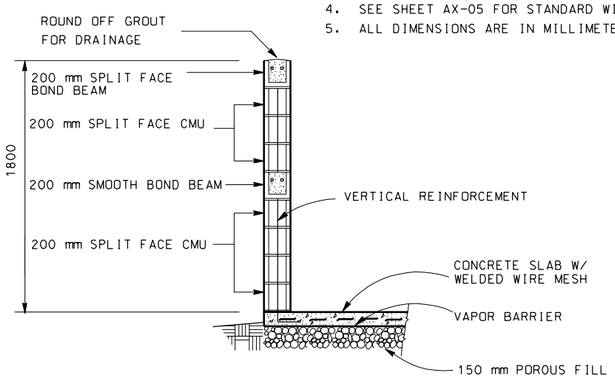

SECTION E
SCALE : 1:50
A-13 A-14

GRAPHIC SCALES
1:50
1000 500 0 1000 2000

US Army Corps of Engineers

Symbol	Description	Symbol	Description	Date	Approved	Date	Approved

Designed by: LM
Date: 01 APR 98
Rev.
Dwn by: LM
Ckd by: LM
Design file no.
Reviewed by: RR
Submitted by: RR
Drawing code: STD 171-24-01
File name: STD24A.DGN
Plot date: 30 MAR 98
Plot scale: FULL

U.S. ARMY ENGINEERING AND SUPPORT CENTER, HUNTSVILLE
HUNTSVILLE, ALABAMA

FORCE XXI/FORCE MODERNIZATION PROGRAM
STANDARD DESIGN
DUAL-SEX LATRINE
WITH WATER CLOSETS (2 OF 2)
(MASONRY CONSTRUCTION)

Sheet reference number:
A -14
Sheet of