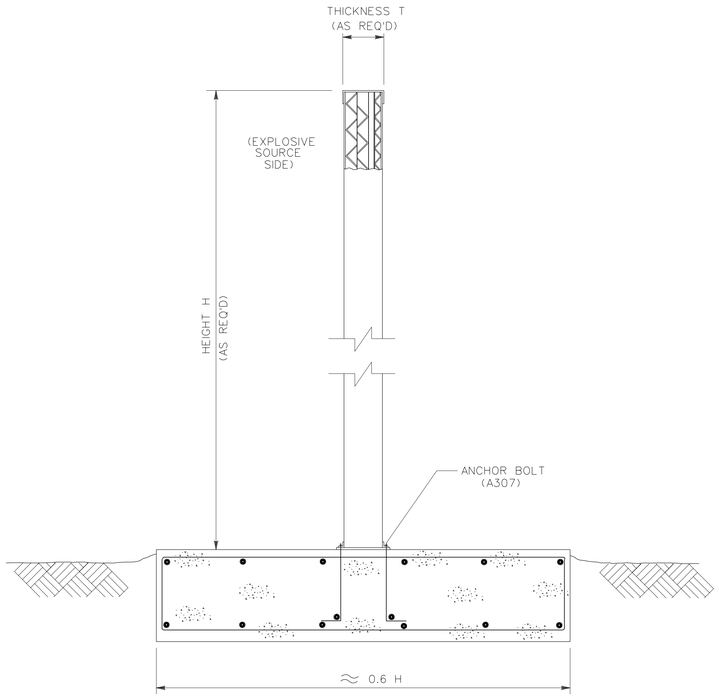

SECTION C D SIM.
N.T.S.



TYPE 1

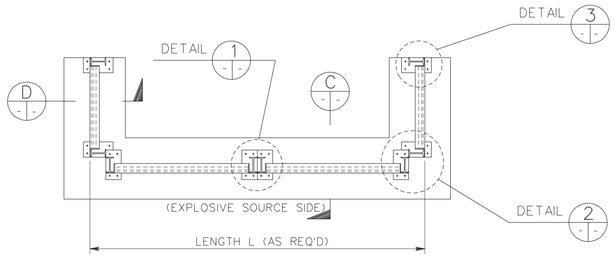

TYPE 2

PLAN
N.T.S.



CONNECTION DETAIL 1
N.T.S.



CORNER DETAIL 2
N.T.S.



END DETAIL 3
N.T.S.

B23 - VENTED SUPPRESSIVE SHIELD WALL SYSTEM

ESTIMATED COST, $		
PER LIN. FT. OF CROSS SECTION 15 FT. HIGH	LUMP SUM END	
	TYPE 1	TYPE 2
2,150	-	7,850

ESTIMATED ERECTION TIME MANHOURS		
100 LIN. FT. OF CROSS SECTION 15 FT. HIGH	END TYPE 1	END TYPE 2
100	-	15

REMARKS:

1. AESTHETICALLY PLEASING.
2. CAN BE ECONOMICALLY INSTALLED WITH UNSKILLED LABOR.
3. AVAILABLE IN DIFFERENT CONFIGURATIONS FOR VARIOUS APPLICATIONS.
4. PROVIDES BLAST AND FLAME SUPPRESSION.
5. PROVIDES HIGH RESISTANCE TO FRAGMENT PENETRATION.
6. EARTH FILL IS NOT ALLOWED FOR VENTED SUPPRESSIVE SHIELD WALLS.
7. BARRICADE MUST BE CONSTRUCTED IN ACCORDANCE WITH THE REQUIREMENTS OF TM 5-1300 (SEE REFERENCES, SHEET 1).
8. PATENTED:
   SHIELDING TECHNOLOGIES INC.
   1003 OLD PHILADELPHIA RD.
   ABERDEEN, MD. 21001
   (301)272-1138

Symbol	Description	Date	Approved
1	NEW SHEET	22NOV91	

Revisions

U.S. ARMY ENGINEER DIVISION,
HUNTSVILLE
CORPS OF ENGINEERS
HUNTSVILLE, ALABAMA

Site adapt A/E :

US Army Corps of Engineers

Dwn. by: RDP
Ckd. by: CB

BARRICADES

Reviewed by :
Date : 22 NOV 91
Sheet reference number : 13
Design file no.: 51734
Rev.

Approved by :
Drawing code : DEF 149-30-01
Sheet 13 of 13

barr13.dgn