

Figure 12-1. Clearances Between Pipes/Walls/Curbs

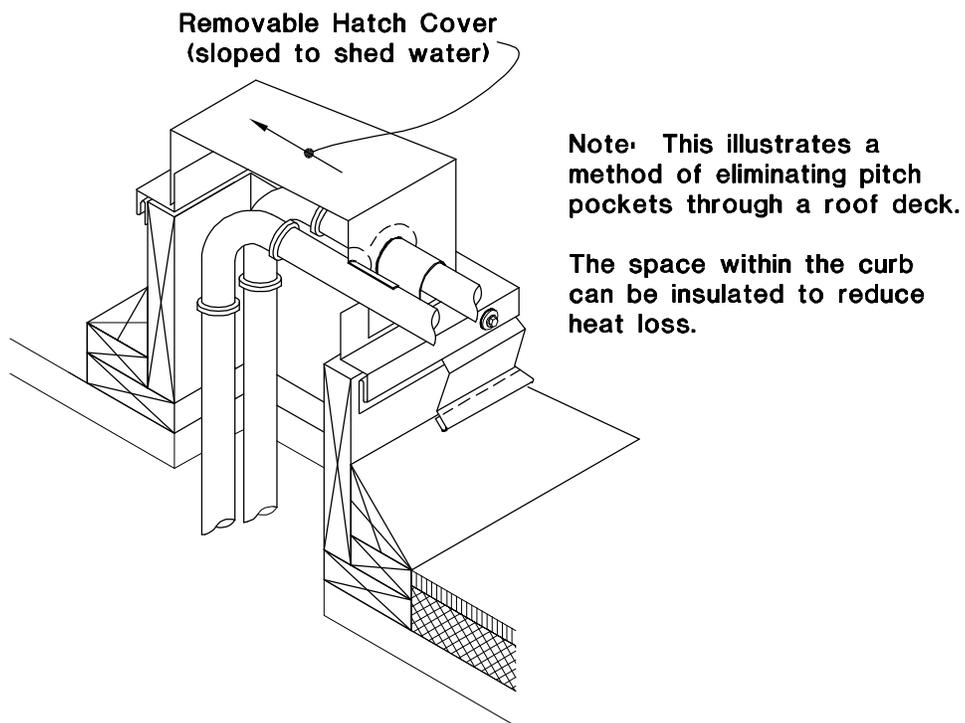


Figure 12-2. Curbed Enclosure for Piping Through Roof Deck

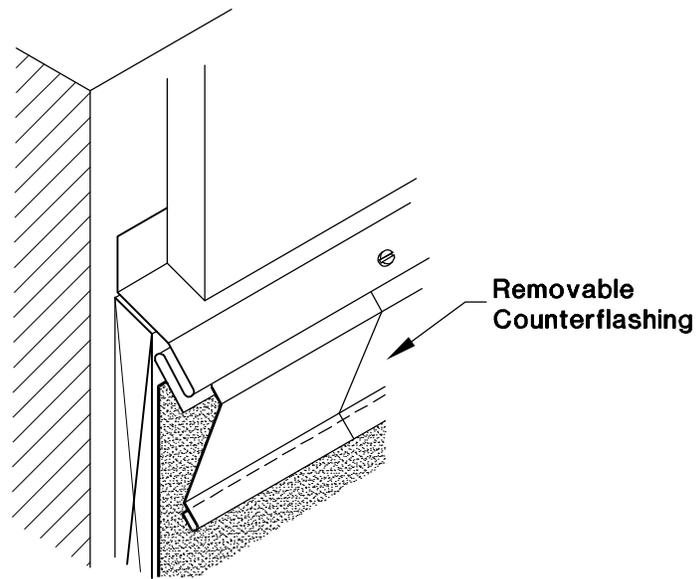


Figure 12-3. Use of Two-Piece Metal Counterflashing

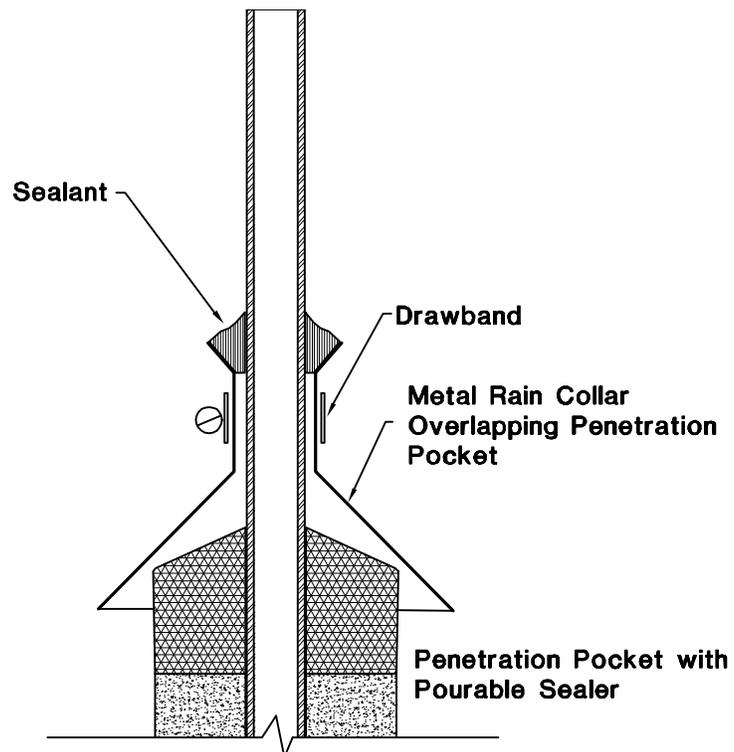


Figure 12-4. Water-Shedding Rain Collar for a Penetration (Pitch) Pocket

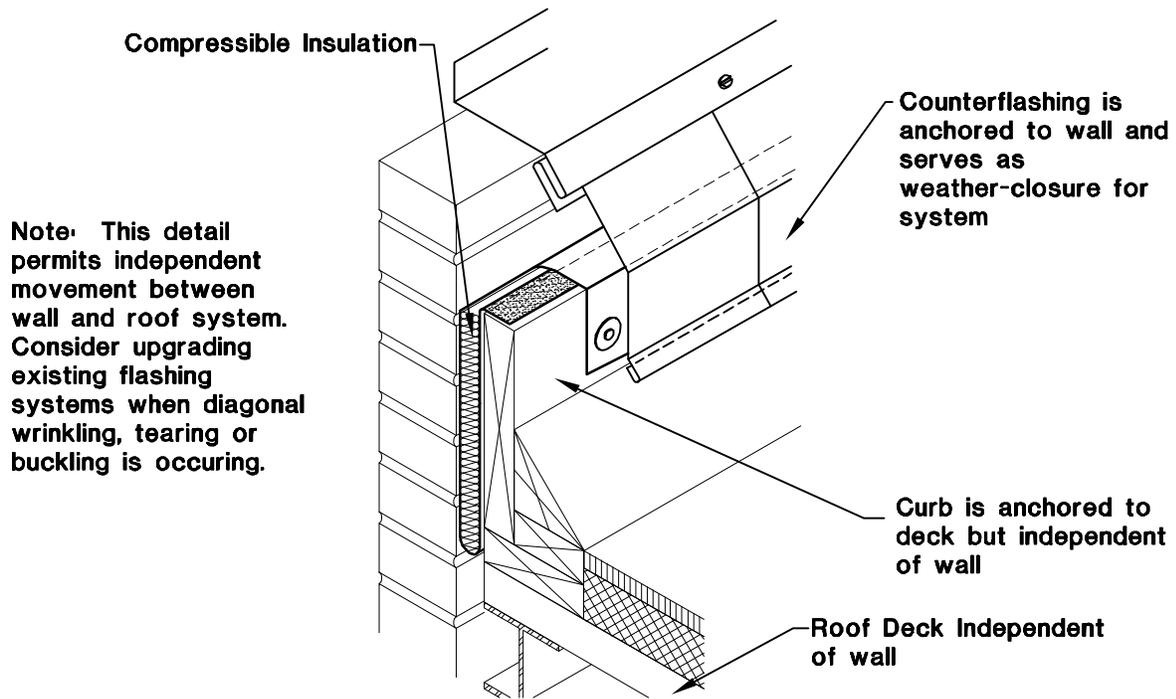


Figure 12-5. Use of Curb for Base Flashing, Independent of Wall Movement



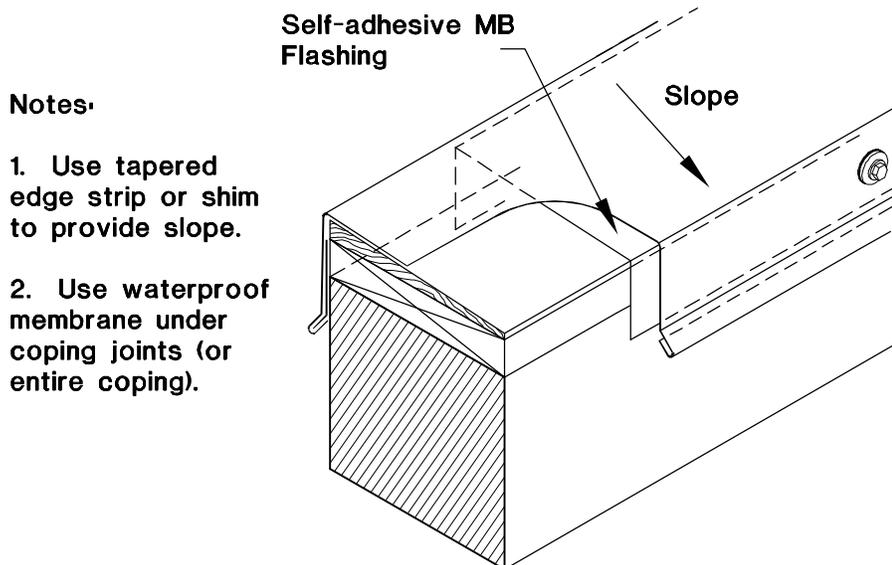



Figure 12-6. Coping Sloped to Shed Water

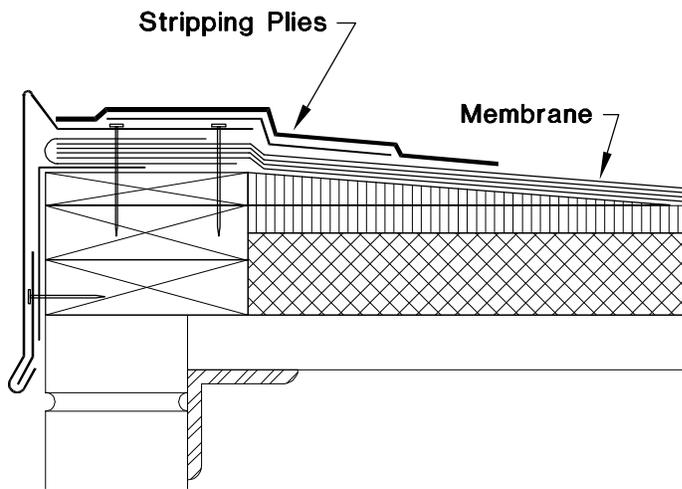

**Figure 12-7a. Metal Gravel Stop/Fascia Embedded Between Membrane Plies and Stripping Plies.**  
**Not Recommended**

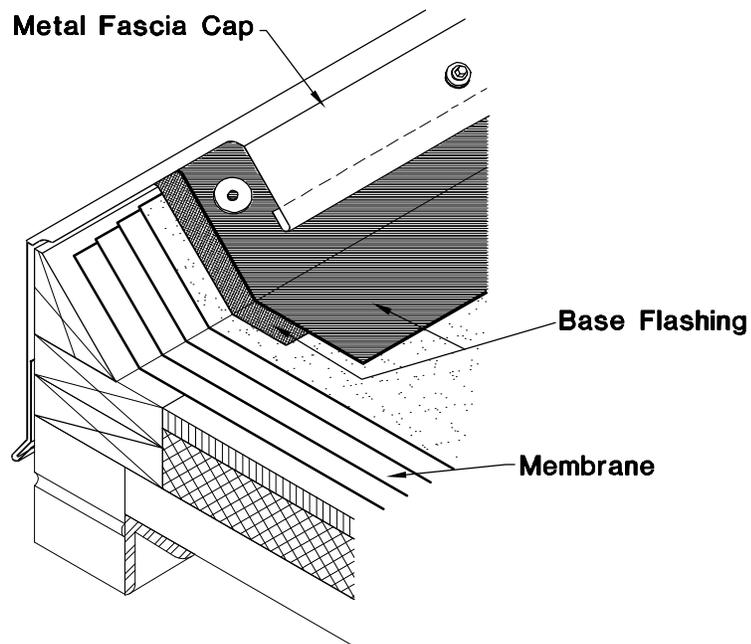

**Figure 12-7b. Metal Fascia Cap Placed Over Completed Membrane and Base Flashing.**  
**Recommended**

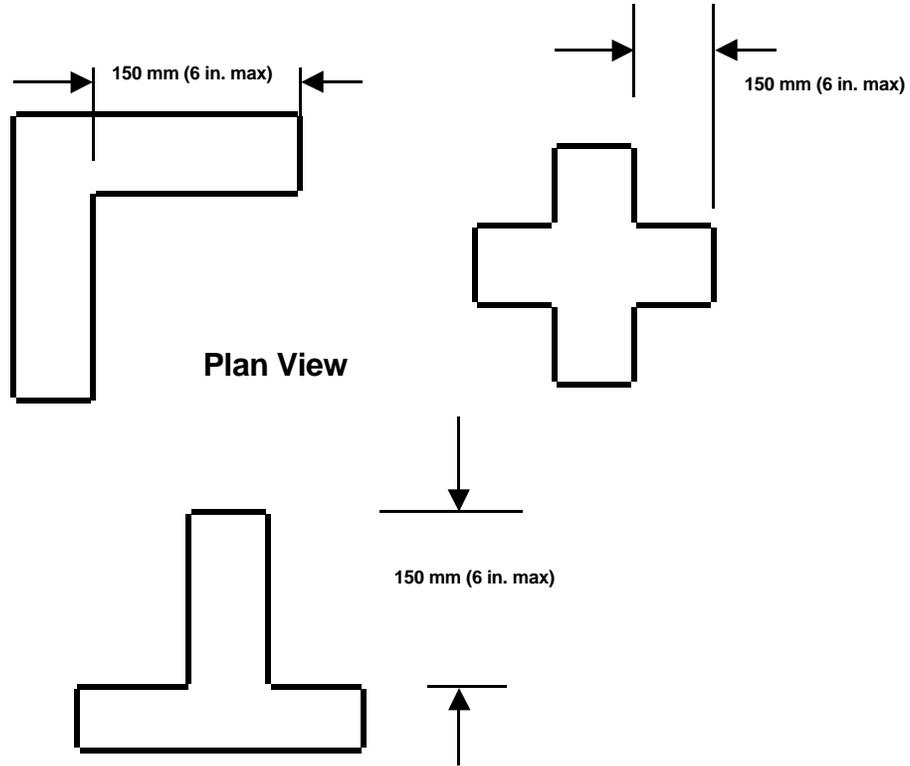

**Figure 12-8. Metal Intersections (Expansion Joint Covers, Gravel Stops, etc.)  
Require Short *Legs* to Accommodate Differential Movement**