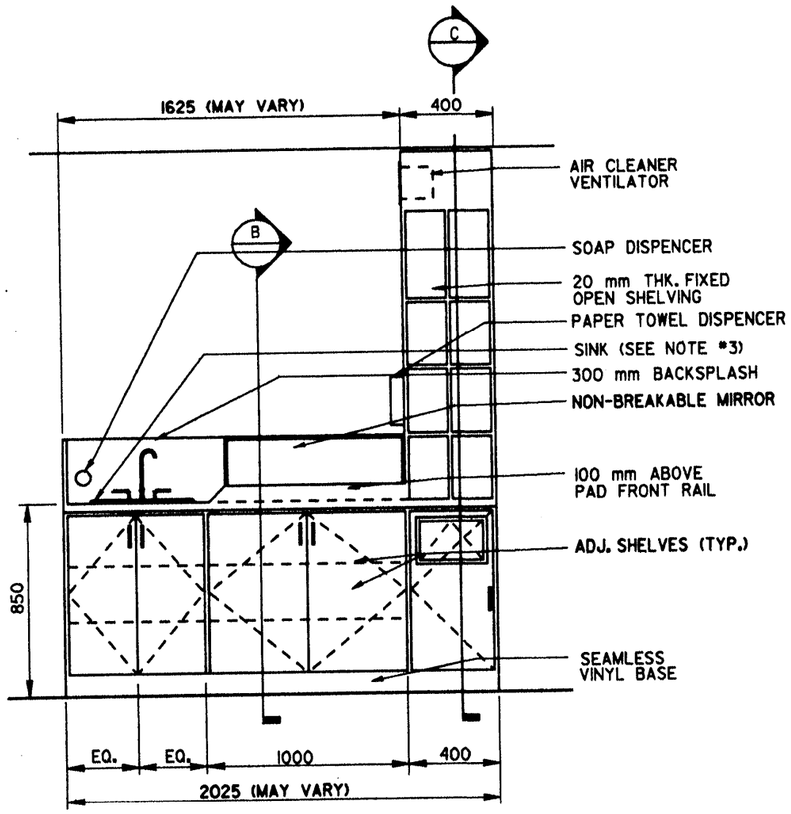

A ELEVATION-DIAPER STATION
1:20 (SEE NOTE 2)

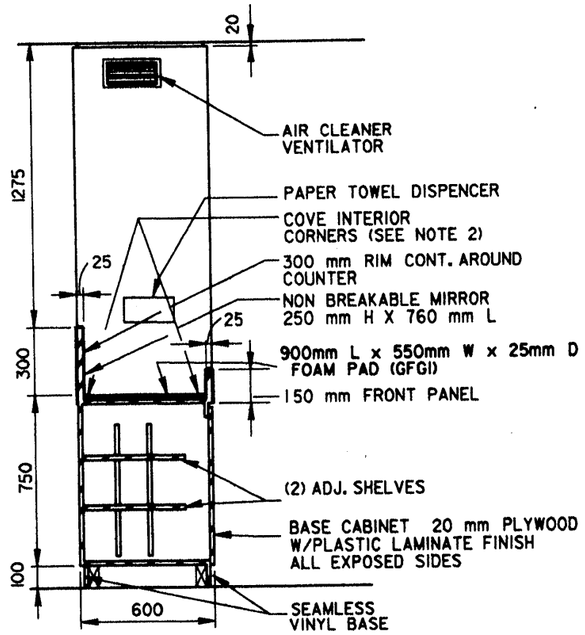

B SECTION-DIAPER STATION
1:20

NOTE: A 525 mm W X 920 mm L X 25 mm thick vinyl covered foam pad shall be contractor furnished - contractor installed.

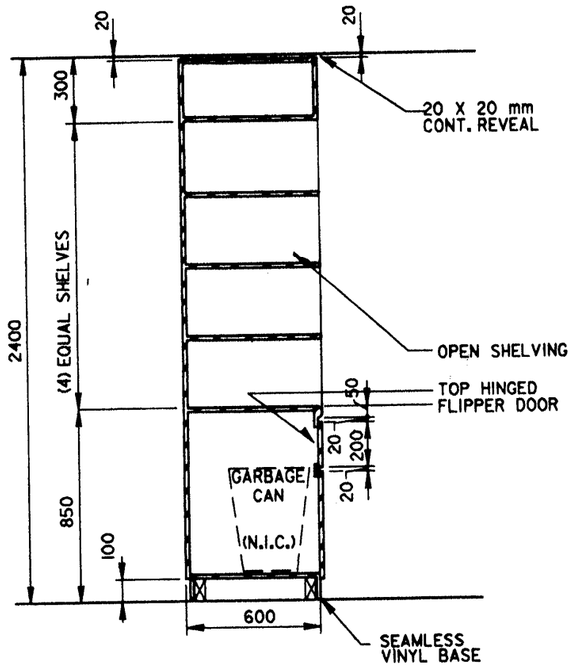

C SECTION-DIAPER STATION
1:20

DESIGNER NOTES:

1. ALL BUILT-IN CABINETS SHALL HAVE A TIGHT FIT AGAINST ADJACENT WALLS AND CEILING TO ELIMINATE OR REDUCE INFILTRATION OF INSECTS AND RODENTS. OPEN JOINTS BETWEEN CABINETRY, WALLS, CEILING & FLOORS SHALL BE CAULKED AND/OR COVERED WITH MATCHING TRIM.

2. FABRICATION OF THE DIAPER STATION IS VERY IMPORTANT TO KEEPING THE STATION CLEAN AND SANITIZED. KEEPING THE NUMBER OF LAMINATE JOINTS TO A MINIMUM ON THE WORK SURFACE IS ESSENTIAL. JOINTS ARE VERY DIFFICULT TO KEEP CLEAN.

3. THE SINK FOR THE DIAPER STATION SHALL HAVE A GOOSE NECK FAUCET WITH WRIST ACTION OR ELBOW HANDLES.

4. ALL EXPOSED SHARP EDGES HORIZONTAL & VERTICAL OF BUILT-IN CABINETS AT CHILD'S HEIGHTS SHALL HAVE ROUNDED CORNERS. HORIZONTAL EXPOSED CORNERS SHALL HAVE FABRICATED EDGES. VERTICAL CORNERS CAN BE RETROFITED AFTER FABRICATION AND INSTALLATION WITH A RUBBER EDGE MOLD TO ATTENUATE ANY IMPACT FROM FALLING CHILDREN.

US Army Corps of Engineers Omaha District

DEPARTMENT OF THE ARMY
FACILITIES ENGINEERING PROGRAM
ARMY CHAPEL
DIAPER STATION DETAILS
XX

Sheet reference number:
23
Sheet 23 of 28