


SCHEME A FLOOR PLAN
 2 1 0 2 4 6 8
 METERS

NOTE: WHILE IT CAN BE VERY TEMPTING TO ELIMINATE PLAN FEATURES WHOSE PURPOSE IS NOT READILY RECOGNIZED (SUCH AS THE DUAL PANTRIES IN THE KITCHEN), PLEASE REMEMBER THAT THEY PROBABLY DO HAVE A PURPOSE BASED ON REQUIREMENTS OF THE CHAPLAINCY, AND THAT ANY CHANGES MUST BE APPROVED AND COORDINATED WITH THE CHAPLAINCY HEADQUARTERS. PRELIMINARY GUIDANCE IS ALSO AVAILABLE THROUGH THE CENTER OF STANDARDIZATION REPRESENTATIVE ASSIGNED TO THIS FACILITY TYPE.

SCHEME A
 UNITS OF LESS THAN BATTALION STRENGTH

PROGRAMMED SPACES	FLOOR AREA (SQ. METERS)
1A WORSHIP 60 SEATS	100
2A STORAGE	14
3A SACRISTY	10
4A CLASSROOM	15
5A CHAPLAIN	11
6A ASSISTANT	8
7A CIRCULATION /VESTIBULE	46
8A TOILET	4
8A TOILET SHOWER	7
10A JANITOR CLOSET	2
11A MECHANICAL	7
12A CLASSROOM	15
12A GATHERING AREA	40
CANOPY	3
TOTAL	281

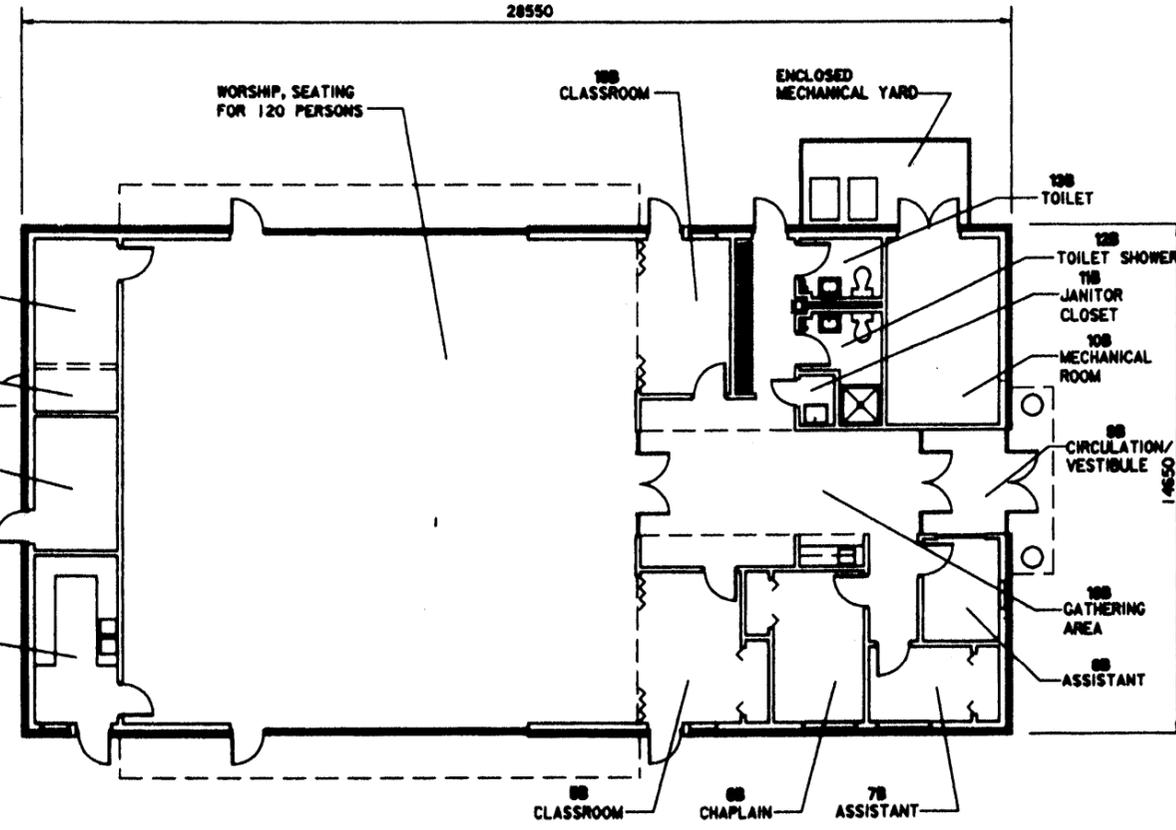

SCHEME B FLOOR PLAN
 2 1 0 2 4 6 8
 METERS

SCHEME B
 UNITS OF LESS THAN BATTALION STRENGTH

PROGRAMMED SPACES	FLOOR AREA (SQ. METERS)
1B WORSHIP 120 SEATS	200
2B STORAGE	14
3B EXTERIOR STORAGE	18
4B SACRISTY	12
5B CLASSROOM	15
6B CHAPLAIN	12
7B ASSISTANT	8
8B ASSISTANT	8
9B CIRCULATION /VESTIBULE	66
10B MECHANICAL	15
11B JANITOR CLOSET	2
12B TOILET SHOWER	11
12B TOILET	11
12B CLASSROOM	15
CANOPY	3
12B GATHERING AREA	25
TOTAL	448


HOWEVER CONSTRUCTION METHODS AND TYPES MUST FOLLOW THE CRITERIA PACKAGE PROVIDED WITH EACH SPECIFIC PROJECT.

COPIES OF DRAWING PACKAGES AND BROCHURES ARE AVAILABLE FROM THE U.S. ARMY ENGINEERING AND SUPPORT CENTER, ATTN: CEHND-ED-ES-1, P.O. BOX 1600, HUNTSVILLE, AL. 35807-4301 (TELEPHONE: COMMERCIAL (205) 895-1402 OR AUTOVON/DSN 645-5560). THIS DRAWING PACKAGE SUPERSEDES THE COLOR BROCHURE VERSION OF THIS FACILITY TYPE IN THE EVENT OF DISCREPANCIES.

MANDATORY ITEMS TO BE INCLUDED IN EVERY FACILITY ARE AS FOLLOWS:

- COMPLETE FACILITY INCLUDING ALL CONFIGURATIONS AS SHOWN IN THIS DEFINITIVE.
- AN EXTERIOR HARD SURFACED ENTRY COURT TO BE CONFIGURED TO FIT THE SPECIFIC SITE YET BE A MINIMUM OF 70 SQUARE METERS, INCLUDED IN THE DESIGN ARE TO BE BENCHES, BOLLARDS AND APPROPRIATE LIGHTING.
- HARD SURFACE WALKWAYS FROM ALL EXTERIOR DOORS TO THE ENTRY COURT.
- COVERED ENTRY AS SHOWN IN THIS DEFINITIVE.
- LANDSCAPE FOR AREAS AROUND THE PERIMETER AND ADJACENT TO THE BUILDING.
- FOLLOWING THE "PACKAGE" OF GOVERNMENTAL AND INDUSTRY CRITERIA IN EFFECT AT THE TIME OF THE DESIGN PROCESS FOR THE SPECIFIC PROJECT. SINCE ALL FORMS OF CRITERIA CHANGE REGULARLY, EACH SPECIFIC PROJECT WILL BE PROVIDED WITH GUIDANCE REGARDING CRITERIA THAT IS MANDATORY TO COMPLY WITH. SUCH CRITERIA MAY CONSIST OF INSTRUCTIONS, CODES, MANUALS, REGULATIONS, OR OTHER FORMS OF DESIGN GUIDANCE.

CONTINUED ON SHEET 4

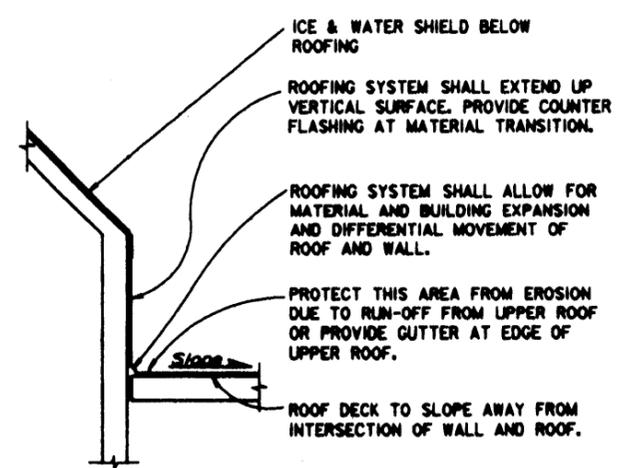

TYPICAL DETAIL AT CHANGE IN ROOF ELEVATION
 NO SCALE

NOTE: PROVIDE OVERFLOW DRAINS OR SCUPPERS IN ALL LOW-SLOPE ROOF AREAS TO PREVENT WATER BUILD-UP DUE TO ACCIDENTAL OBSTRUCTION OF ROOF DRAINS.

REVISIONS TO THIS DRAWING SHALL BE MADE BY THE ARCHITECT OR ENGINEER OF RECORD. THIS DRAWING IS THE PROPERTY OF THE U.S. ARMY ENGINEERING AND SUPPORT CENTER. IT IS TO BE USED ONLY FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED HEREON.