CORPS OF ENGINEERS | 4 | 3 | 2 | 1 U. S. ARMY

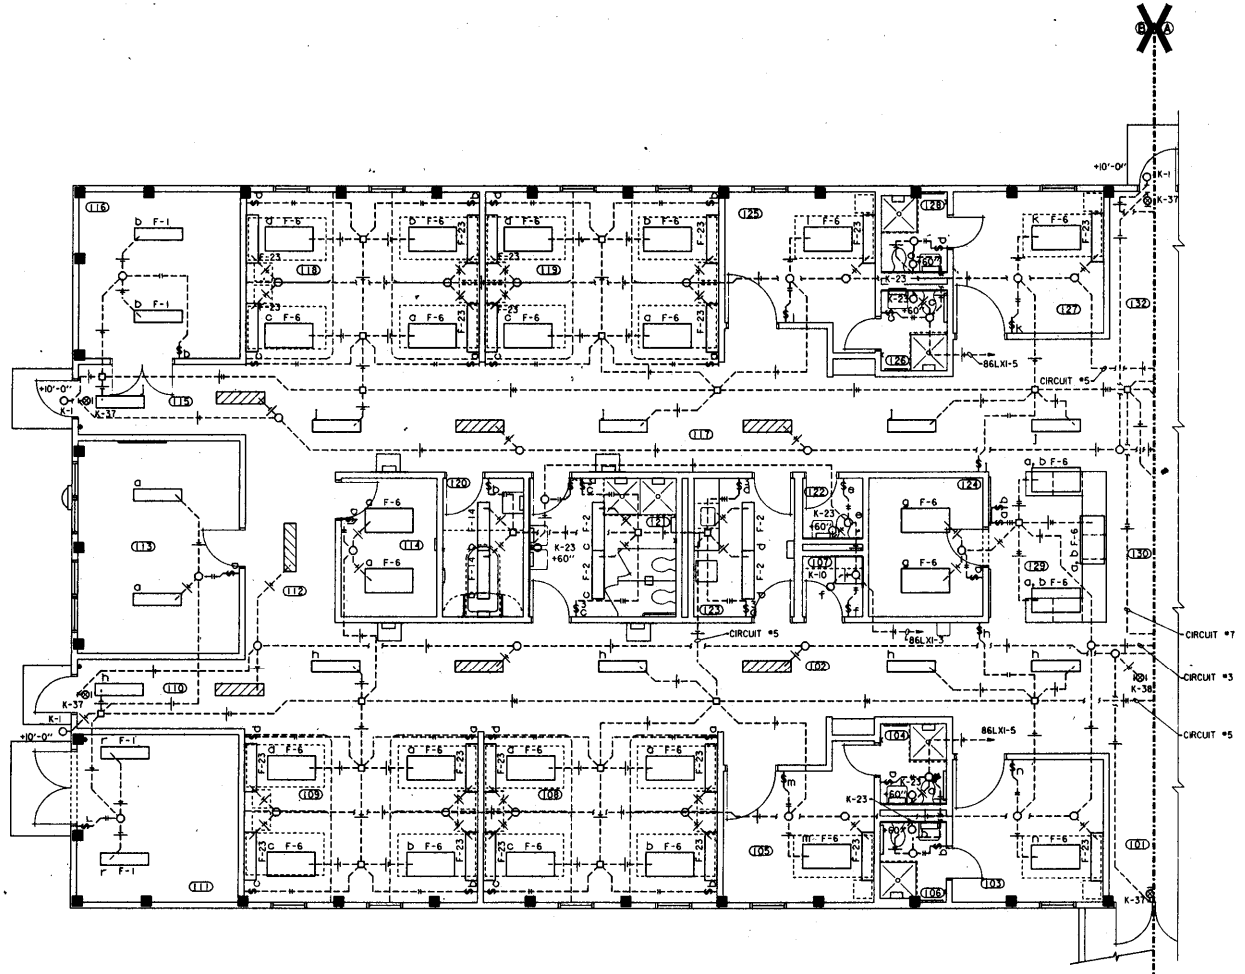

UNIT "B" LIGHTING PLAN

1/4 INCH = 1 FOOT



KEY PLAN

PLAN NOTES:

1. ALL LIGHT FIXTURES SHOWN SHALL BE TYPE F-8 UNLESS OTHERWISE NOTED.
2. ALL WIRING SHOWN SHALL BE 1/2" CONDUIT WITH #12 AWG WIRE AS INDICATED UNLESS OTHERWISE NOTED. ALL WIRE INSULATION SHALL BE RATED 75°C UNLESS OTHERWISE NOTED.
3. SEE XE SERIES DRAWINGS FOR LIGHT FIXTURE SCHEDULES.
4. ALL LIGHT FIXTURES SHOWN SHALL BE 277 VOLT EXCEPT TYPES K-10 AND K-23 FOR ROOMS 104, 106, 107, 122, 126 AND 128.
5. INSTALL ALL F-23 FIXTURES +72".
6. MOUNTING HEIGHTS SHOWN ON EXTERIOR LIGHTS ARE FROM THE FINISHED FLOOR TO THE TOP OF THE LIGHT FIXTURE.
7. SEE G SERIES DRAWINGS FOR ELECTRICAL SYMBOL SCHEDULES, ABBREVIATIONS AND GENERAL NOTES.
8. MOUNTING HEIGHTS SHOWN ON INTERIOR LIGHTS ARE FROM THE FINISHED FLOOR TO THE BOTTOM OF THE LIGHT FIXTURE.
9. SEE SHEET E7 FOR EQUIPMENT MOUNTING DETAIL OVER PATIENT BEDS.

ROOM NAME & NUMBER LIST

NO.	NAME
101	HALLWAY
102	HALLWAY
103	1 BED ROOM
104	BATH
105	1 BED ROOM
106	BATH
107	JANITOR'S CLOSET
108	4 BED WARD
109	4 BED WARD
110	HALLWAY
111	MECHANICAL
112	HALLWAY
113	DAY ROOM
114	OFFICE
115	HALLWAY
116	EQUIPMENT ROOM
117	HALLWAY
118	4 BED WARD
119	4 BED WARD
120	TUB ROOM
121	TOILET
122	STAFF TOILET
123	SOILED UTILITY
124	WORK ROOM
125	1 BED ROOM
126	BATH
127	1 BED ROOM
128	BATH
129	NURSE'S STATION
130	HALLWAY
132	HALLWAY

Symbol	Description	Date	Approved
	Revisions		

J. E. SIRRINE COMPANY
ARCHITECT - ENGINEER DIVISION
GREENVILLE, SOUTH CAROLINA

US ARMY ENGINEER DIVISION HUNTSVILLE
CORPS OF ENGINEERS
HUNTSVILLE, ALABAMA

Site adapt A/E :

ARMY MOBILIZATION DESIGNS
US Army Corps of Engineers

WARD - 46 BED

UNIT B LIGHTING PLAN

Dwn. by : WLS | Ckd. by : JML

Reviewed by : WHA | Date : 14 MAY 84 | Sheet reference number : E-2 | Design file no. : M086E02 | Rev.

Approved by : JML | Drawing code : M 510-10-F | Sheet 2 of 11

1/4" = 1'-0"

5 | 4 | 3 | 2 | 1

T 15 D2