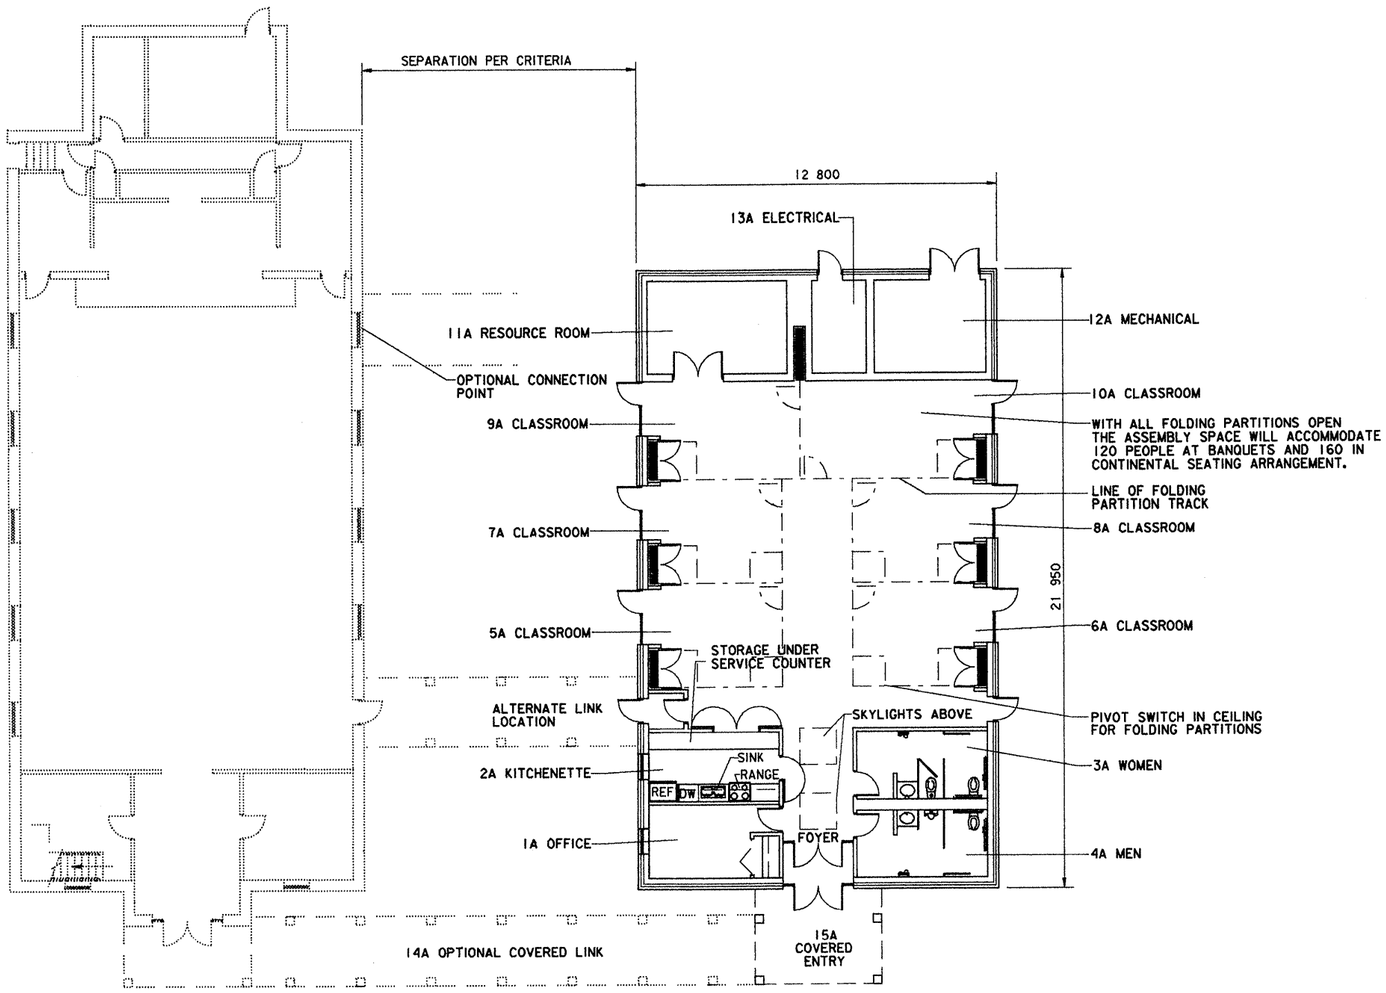

TYPICAL EXISTING CANTONMENT CHAPEL

RELIGIOUS EDUCATION FACILITY

SCHEME A
FLOOR PLAN

2 1 0 2 4 6 8
1:100 METERS

AREA ANALYSIS SCHEME A

ROOM NO.	PROGRAMMED SPACES	FLOOR AREA (SQ. METERS)
1A	OFFICE	13
2A	KITCHEN	12
3A	WOMEN	13
4A	MEN	13
5A	CLASSROOM	17
6A	CLASSROOM	17
7A	CLASSROOM	17
8A	CLASSROOM	17
9A	CLASSROOM	22
10A	CLASSROOM	22
11A	RESOURCE ROOM	19
12A	MECHANICAL	12
13A	ELECTRICAL	6
14A	COVERED LINK (1/2 AREA)	18[1]
15A	COVERED ENTRANCE (1/2 AREA)	7
TOTAL NET SQUARE AREA		225
CIRCULATION /STRUCTURAL /MISC.		85
TOTAL GROSS SQUARE AREA		310[2]

1. 18SM BASED ON 3 M WIDE BY 12 M LONG LINK.
2. AREA TO BE ADJUSTED PER SITE CONDITIONS.

US Army Corps of Engineers
Omaha District

Approved by
USACE Director of Mil. Proj. Date:
Approved by
Date:
ACS for Install. Mgmt. Date:

Recommended by
Director of Engineering Date:
Recommended by
Division Engineer/CERHD DE Date:
Recommended by
Chairman,USACE Std Committee Date:

Approved Function of Adequacy
Subcommittee Chairman Date:
Prepared by
US ARMY CORPS OF ENGINEERS
HUNTSVILLE DIVISION
HUNTSVILLE,ALABAMA
Chief Design Date:

Designed by: X
Dwn by: L.CRAIG
Ckd by: X
Reviewed by: X
Submitted by: X
Chief: X Section
Date: X
Design file no. F:\pr-ced\5.dgn
Plot Scale Ratio: 1:100
Drawing code: DEF 790-18
Rev.
Spec. No. DACA 45
Contract No. DACA 45

DEPARTMENT OF THE ARMY
FACILITIES STANDARDIZATION PROGRAM
RELIGIOUS EDUCATION FACILITIES
FLOOR PLAN - SCHEME A

Sheet reference number:
5
Sheet 5 of 18